


NORD Power Genius 3000

instrukcja podłączenia i konfiguracji falownika


Solax X3-Ultra

Połączenie transmisji danych

1. Podłącz kabel danych do portu komunikacyjnego falownika (**COM1**) za pomocą złącza RJ-45 (pin 1 = 485-A, pin 2 = 485-B).

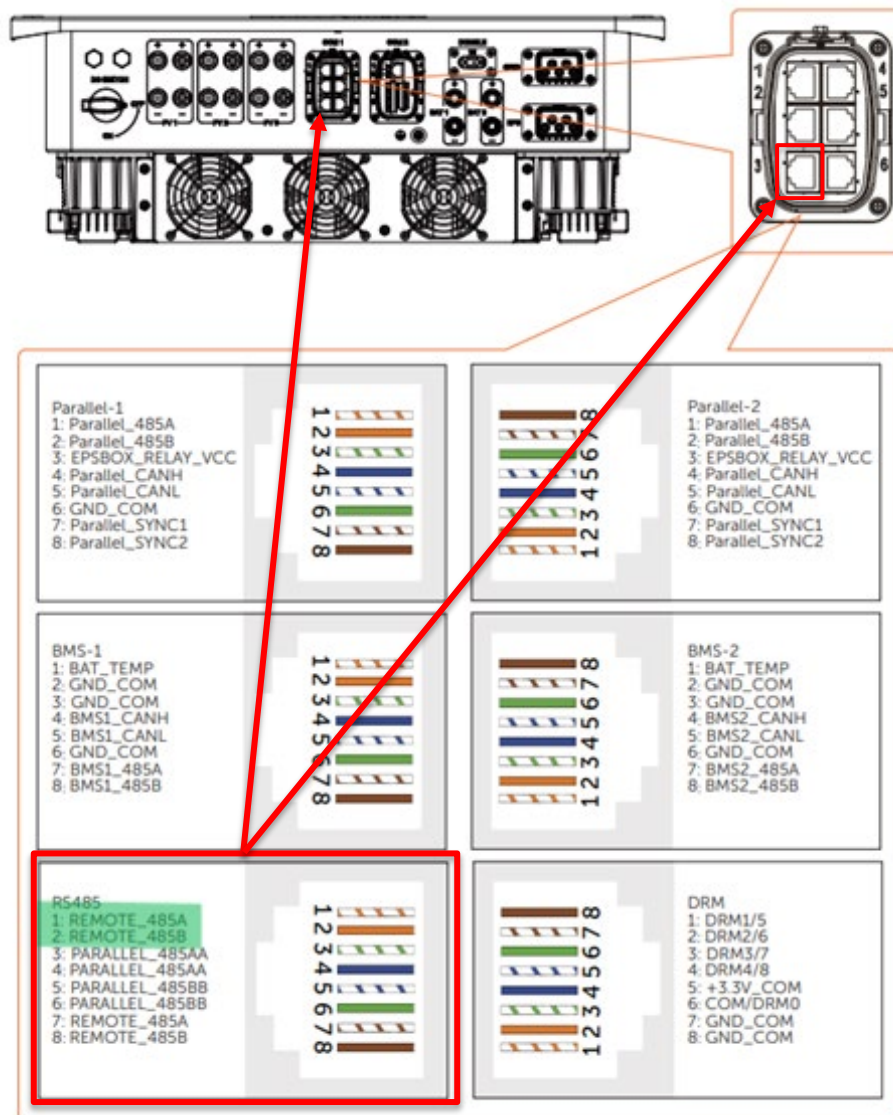

- Następnie podłącz kabel danych do NORD Power Genius 3000 zgodnie z instrukcją instalacji (bezpośrednie połączenie A do A, B do B).

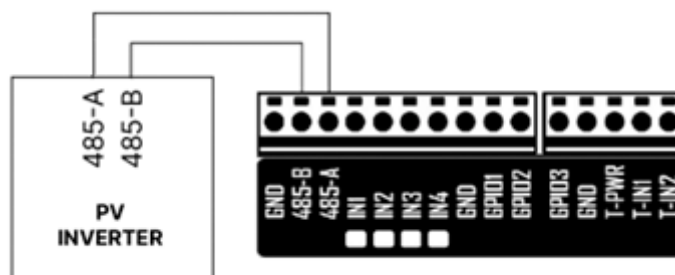

Konfiguracja falownika

Parametry komunikacji: 19200 (8, N,1) Adres Modbus: 1

Do prawidłowej komunikacji niezbędne jest prawidłowe podłączenie falownika **Solax Ultra**: "**Setting -> Advanced Setting -> Modbus -> Baud rate value 19200 (or 9600, depending on the variant of FW used)**".

The screenshot shows a configuration interface for the Modbus protocol. It has a title 'Modbus' with an upward arrow. Below the title, there are two settings: 'Baud Rate' with a value of '19200' and a 'Save' button, and 'Address' with a value of '1' and a 'Save' button.

Kompatybilność

To urządzenie jest w pełni kompatybilne - bez ograniczeń funkcji Power Genius 3000.